



The Award-Winning "Half-Shell" Design

The heart of the Isonic® concept is its patented "half-shell" design. Composed of two mirror-image halves, Isonic® allows its flow channels and internal component compartments to be designed directly into these molded body sections. Valve bodies are molded of high-strength, glass-impregnated Ultem thermoplastic.

Assembly is achieved by simply inserting the various valve elements into their corresponding "half-shell" pockets. Internal components are easily positioned to make optimal use of space.

The valve is completed by ultrasonically welding the two valve segments, creating a strong bond and hermetic seal. This design totally eliminates the need for fasteners, adhesives, gaskets and inserts.

Revolutionary Valve Production

Isonic® technology eliminates all machining operations associated with valve manufacturing. Requiring only simple assembly, Isonic® can be produced quickly and easily with significant cost reduction.

Design Optimizes Valve Performance

Isonic® 2, 3 and 4-way valves feature a unique, multi-patented design that significantly shrinks valve size while boosting flow capacity. With its design and a state-of-the-art manufacturing process, Isonic® breaks through the restriction and limitations of conventional valve manufacturing.

Loaded with Standard Features

Along with its size and price advantages, Isonic® offers numerous user features, many of them standard. Most models feature an integral electronic board with surge suppression and LED. A variety of voltages and wiring options are available. This combination of price and versatility make Isonic® the perfect control choice for pneumatic systems.

New Patents

Patent #	Patented Property
5,222,715	"Half-Shell" Valve Construction
5,341,846	Plug-In Valve Stack Assembly

Additional Patents Pending

Faster Manifold Connections

The Isonic® manifold system has been designed to virtually eliminate downtime, eliminating all end plates, screws, o-rings and gaskets customarily found in manifold systems. Connecting any valve to the manifold base is as easy as plugging in an electrical cord. With this patented "plug-in" design, replacing an individual valve can be accomplished in seconds, without the aid of any tools!

Available in two, three, four or five station segments, the Isonic® manifold's unique modular design creates a versatile, expandable control base. For larger manifolds, two or more segments can be easily combined to fulfill any needs. Further, manifold segments are easily isolated for applications with differential pressures.

Quick-Connect Collets - No Fittings Needed

With its unique design Isonic® eliminates the need for tube fittings. Built-in, push-to-connect collets allow for fast and easy tube and manifold connections.

Resistant To Harsh Conditions

Molded from a high performance thermoplastic, Isonic® achieves superior heat, impact and chemical resistance. It is listed with both UL and CSA.

Maximum Air Flow

Instead of the angular passages of most conventional valves, Isonic's internal channels are aerodynamically shaped for maximum air flow and minimal internal friction. Eliminating sharp corners and abrupt changes in direction reduces air turbulence and energy loss. Normally round air passages are replaced by thin, deep, tape-like channels that conserve space and optimize air flow.

Isonic® V1 and V4 have earned UL recognition and have been tested to the standards of CSA and conforms to the applicable directives of the European Union.



Isonic® is a registered trademark of Mead Fluid Dynamics, Inc.

Specifications

Design :	Poppet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life:	50,000,000 cycles
Orifice Size:	A: 0.025" / 0.65mm B: 0.035" / 0.90mm C: 0.055" / 1.4mm
Flow:	A: 0.01 C _v B: 0.02 C _v C: 0.05 C _v
Maximum Pressure:	A: 120 PSI / 8.3 Bar B: 120 PSI / 8.3 Bar C: 30 PSI / 2.1 Bar
Vacuum:	to 28 in .Hg
Temperature Range:	0° - 120°F / 49°C
Tubing:	5/32" or 4mm
Mounting Holes:	0.156 diameter (1 hole, 1 slot)
Seals:	Viton® and Nitrile
Weight:	1.5 oz. (per valve)

Solenoid Data

Voltage	12DC	24DC	24AC	120 AC
Amps	0.133	0.058	0.058	0.014
Resistance	92Ω	406Ω	406Ω	8350Ω
Initial Power	1.6	1.4	1.4	1.7
Continuous On	1.3	1.2	1.2	1.5

Response Time: 10 milliseconds

Molex Connector: UL and CSA Listed

Din Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications

Manifold

Common Air Inlet: Built-in, push-in fittings for 1/4" OD or 6mm tubing both ends


Foot Mounting: 4 slots, 11/64" diameter

DIN Rail Mounting: Attaches to 15mm DIN rail


Valve Symbols:




Dimensions

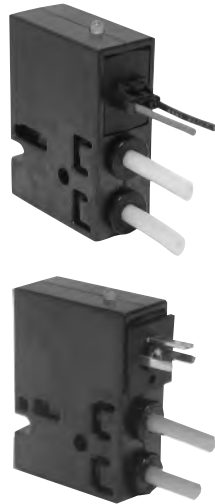

Valves:

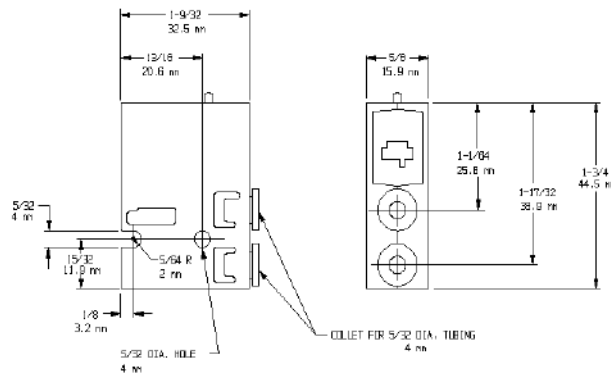

Manifolds

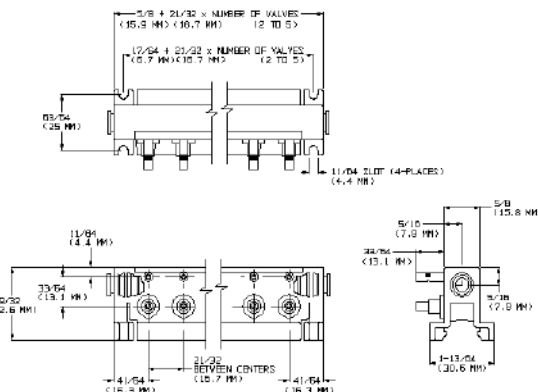

Accessories



P1SA1



P1SA2



P1Q1

NOTE: (1) pc. is included with each "W" type valve. 24 AWG wire.



MM-019

Muffler shown here on V1 Valve with T1 option

How To Order

V 1 B 04 - A W 1 - ()**

Product Category

V = Valve

Family

1 = Isonic® 1000 (2-way; 3-way)

Orifice Size

A = 0.025" (0.6mm)
 B = 0.035" (0.9mm)
 C = 0.055" (1.2mm)

Flow Pattern

02 = 2-Way Normally Closed
 04 = 3-Way Normally Closed
 05 = Vacuum (3-Way) Normally Closed
 06 = Vacuum (2-Way) Normally Closed

Options

T1 = Tapped Exhaust (10-32)
 T2 = Tapped Exhaust (M5x0.80)

LED

0 = No LED
 1 = LED (not available with connector Z)

Connector

W = Mini Quick Connect
 (with electronic board)
 X = 8mm micro DIN (with board)
 connector not included
 Y = Flying Lead (with board)
 Z = Flying Lead
 (no board - DC only)

Solenoid Voltage

A = 12 DC
 B = 24 DC
 D = 24 50/60 Hz AC
 F = 120 50/60 Hz AC

Manifolds:

M 1 04 - J 0 - ()**

Product Category

M = Manifold

Family

1 = Isonic® 1000 (2-Way; 3-Way)

Number of Stations

02 = 2 Stations
 03 = 3 Stations
 04 = 4 Stations
 05 = 5 Stations
 N = N Stations (modular segments are combined for manifolds over 5 stations)

Options

A = Aluminum Manifold

Manifold Assembly

0 = Manifold Only
 2 = Assembled Manifold on DIN rail

Common Air Inlet (Both Ends)

J = Push in fitting for 1/4" O.D. tubing
 K = Push in fitting for 6mm tubing

Accessories:

Electrical Connectors

8mm Micro DIN Connector P1D1
 8mm Micro DIN Connector (molded, pre-wired) . P1D2 (Includes 39"/ 1m leads)
 Mini Quick-Connect P1Q1 (includes 18"/ 45cm leads; contact factory for longer lengths)

Manifold Accessories

15mm DIN Mounting Rail P1M1-x (where x = desired number of feet of DIN rail)
 15mm DIN Rail End Stops P1S1 (note: two required per manifold)
 4mm (5/32) Manifold Blocking Plug P1B1 (for blocking empty manifold stations)
 1/4" Manifold Inlet Port Plug P1P1 (one included with each manifold)
 6mm Manifold Inlet Port Plug P1P2 (one included with each manifold)

Miscellaneous

10-32 Muffler MM-019 (to silence exhaust in 10-32 exhaust port)
 Port Adapter P1SA1 (converts 5/32" port to 1/4" barb OD tube)
 Port Adapter P1SA2 (converts 5/32" port to 1/4" push-to-connect OD tube)

See additional accessories on page 17

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices


Accessories

Index


NEW!

Dimensions

Valves

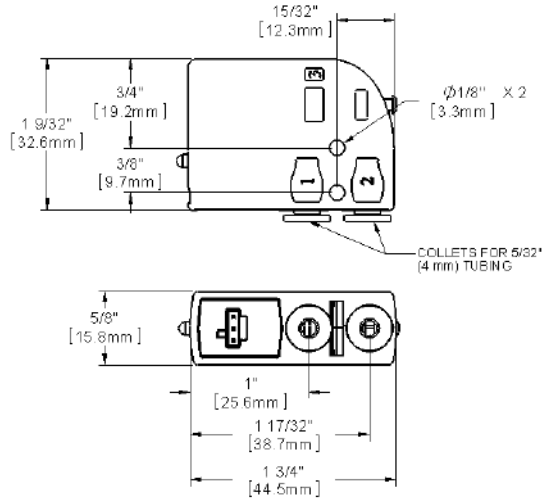

Manifolds

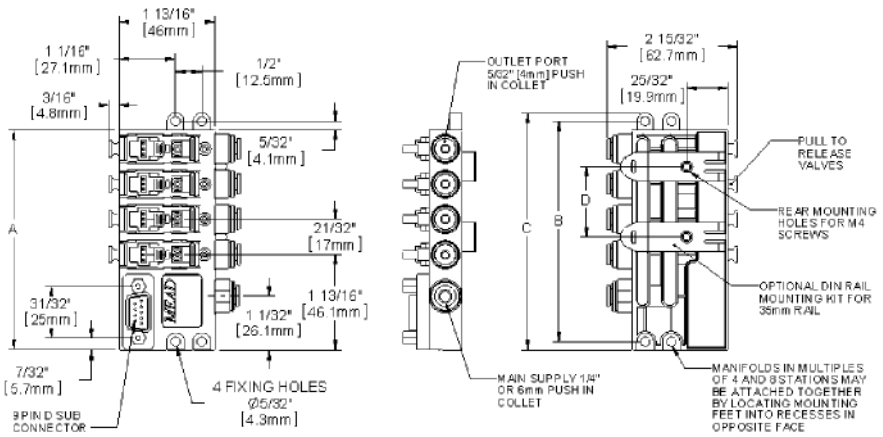


Manifold	A	B	C	D
4	4-3/16	4-3/16	4-1/2	1-11/32
Station	[106.3]	[106.3]	[114.3]	[34]
8	6-7/8	6-7/8	7-13/32	4-1/32
Station	[174.3]	[174.3]	[188.3]	[102]


Note: Dimensions in inches [mm]

First numbers are the pin numbers. Center information refers to station. Colors are the wire color of Mead accessories

9-Pin Sub-D Connector
(4 Station Manifold Only)



9-Pin Sub-D Connector
(8 Station Manifold Only)

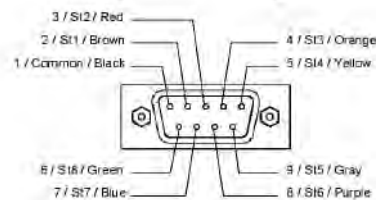

Specifications—Normally Closed Version


Design :	Poppet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life*:	50,000,000 cycles
Orifice Size:	A: 0.025" / .65mm B: 0.035" / .90mm C: 0.055" / 1.40mm
Flow:	A: 0.01 C _v B: 0.02 C _v C: 0.05 C _v
Maximum Pressure:	A: 120 PSI / 8.3 Bar B: 120 PSI / 8.3 Bar C: 30 PSI / 2.1 Bar
Vacuum:	To 28 in Hg
Temperature Range:	0°F to 120°F / -18°C to +49°C
Tubing:	5/32" or 4mm
Mounting Holes:	0.156" diameter (2 holes)
Seals:	Viton® and Nitrile
Weight:	1.5 oz. (per valve)

Specifications—Normally Open Version

Design :	Poppet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life*:	10,000,000 cycles
Orifice Size:	B: 0.035" / 0.90mm C: 0.055" / 1.40mm
Flow:	B: 0.02 C _v C: 0.05 C _v
Maximum Pressure:	B: 90 PSI / 6.2 Bar C: 25 PSI / 1.6 Bar
Vacuum:	To 28 in Hg
Temperature Range:	0°F to 120°F / -18°C to +49°C
Tubing:	5/32" or 4mm
Mounting Holes:	0.156" diameter (2 holes)
Seals:	Viton® and Nitrile
Weight:	1.5 oz. (per valve)

* Tested under typical industrial operating conditions; for extended operation at environmental extremes (temperature, etc.) consult Mead.

Valve Symbols



Solenoid Data

Voltage	12DC	24DC	24AC	120 AC
Amps	0.133	0.058	0.058	0.014
Resistance	92Ω	406Ω	406Ω	8350Ω
Initial Power	1.6W	1.4W	1.4W	1.7W
Continuous On	1.3W	1.2W	1.2W	1.5W

Response Time: 10 milliseconds

Molex Connector: UL and CSA Listed

DIN Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications

Manifold

Common Air Inlet: Built-in, push-in fittings for 1/4" OD or 6mm tubing

Rear Mounting: 2 Holes for M4 screws

DIN Rail Mounting: Attaches to 35mm DIN Rail

Accessories



P2B1



P4M1-x



P5-09SCD



P1SA1



P1SA2



P1Q1

NOTE: (1) pc. is included with each "W" type valve. 24 AWG wire



P4S1

How To Order

Valves:

V 2 B 04 - B Z 0 - T1

Product Category

V = Valve

Family

2 = Isonic® 2000

Orifice Size

A = 0.025" (0.6mm) (only available on NC)
 B = 0.035" (0.9mm)
 C = 0.055" (1.4mm)

Flow Pattern

02 = 2-Way Normally Closed
 03 = 3-Way Normally Open
 04 = 3-Way Normally Closed
 05 = Vacuum (3-Way) Normally Closed
 06 = Vacuum (2-Way) Normally Closed
 07 = Vacuum (3-Way) Normally Open

Options

T1 = Tapped Exhaust (10-32)
 T2 = Tapped Exhaust (M5x0.80)

LED

0 = No LED (only available with connector Z)
 1 = LED standard (not available with connector Z)

Connector

W = Mini Quick Connect (with electronic board) Required for Manifold
 X = 8mm Micro DIN (with board) Connector not included
 Y = Flying Lead (with board)
 Z = Flying Lead (no board - DC only)

Solenoid Voltage

A = 12 DC
 B = 24 DC
 D = 24 50/60 Hz AC
 F = 120 50/60 Hz AC

Manifolds:

M 2 B 08 1 5

Product Category

M = Manifold

Family

2 = Isonic® 2000

Inlet Tube Size

A = 1/4" OD Tube Collets
 B = 6mm OD Tube Collets

Options

0 = No cable or connector
 5 = With 5.0m cable and connector

Manifold Accessories

0 = Manifold only
 1 = DIN Rail clips mounted on Manifold
 2 = Manifold mounted on DIN Rail

Number of Stations

04 = 4 Station
 08 = 8 Station

Note: Outlet tube size is 5/32" (4mm) OD Tube Collet

Accessories:

Electrical Connectors


8mm Micro DIN Connector P1D1
 8mm Micro DIN Connector (molded, pre-wired). . P1D2 (includes 39"/ 1m leads)
 Mini Quick-Connect P1Q1 (includes 18"/ 45cm leads; contact factory for longer lengths)

Manifold Accessories

35mm DIN Mounting Rail P4M1-x (where x = desired number of feet of DIN Rail)
 35mm DIN Rail End Stops P4S1 (note: two required per Manifold)
 Manifold Blocking Plug P2B1 (for blocking empty Manifold stations)
 5.0m Cable and 9 Pin Connector P5-09SDC

Miscellaneous

10-32 Muffler MM-019 (to silence exhaust in 10-32 exhaust port)
 Port Adapter P1SA1 (converts 5/32" port to 1/4" barb OD tube)
 Port Adapter P1SA2 (converts 5/32" port to 1/4" push-to-connect OD tube)

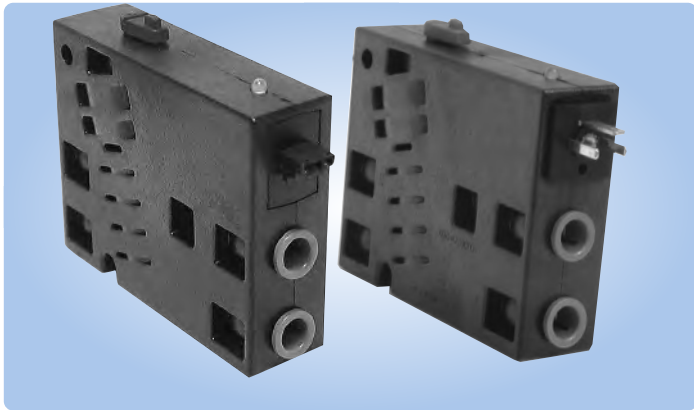

Isonic® Control Valves

While only 20 mm in width, these 2 position spool valves provide a surprisingly high flow ($C_v=0.8$). With its thin, aerodynamic flow passages, Isonic® maintains a higher flow in a smaller area. The pilot piston features an innovative oval design to further facilitate a compact, low-profile power valve.

Versatile Mounting

With a hole and a slot molded into its body, Isonic® valves may be mounted flush to any flat surface. Mounting brackets are also available for individual surface or DIN rail mounting.

Solenoid Data

Voltage	Amps	Resistance	Initial Power	Continuous On
12DC	0.133	92	1.6	1.3
24DC	0.058	406	1.4	1.2
24AC	0.058	406	1.4	1.2
120AC	0.014	8350	1.7	1.5

Specifications	
Design:	Spool (2-Position)
Ports :	1/4" OD tube collet or 6mm OD tube collet
Pilot Ports :	5/32" (4mm) OD tube collet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life:	20,000,000 (minimum)
Orifice Size:	0.2" (5.0mm)
Flow:	0.8 C_v
Vacuum:	Air pilot models can be used in vacuum applications with external air signal to pilot ports
Minimum Pressure:	30 PSI (2 Bar)
Maximum Pressure:	120 PSI (8.3 Bar)
Temperature Range:	0° - 120°F (-18°C - 49°C)
Mounting Holes:	0.177" (4.5mm) diameter (1 hole, 1 slot)
Weight:	Solenoid models 3.1 oz each Air Pilot models 2.1 oz each

Materials

Body GE thermoplastic
Seals Fluorocarbon and Nitrile


Electrical

Voltagess DC: 12, 24
. AC: 24, 110/120
Leads 18" standard - 24 AWG wire
Duty Cycle Continuous duty
Response Time 16 milliseconds @ 100 PSI
Serial Interface 10-pin flat cable connector
Manual Override Standard (solenoid models)




Din Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications


Pressure Piloted Models

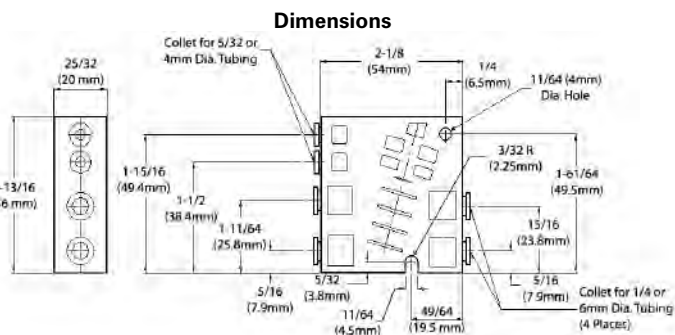

Function




Symbol




* Arrow Indicates Pressure applied to Pilot Port
1.....Air Supply 2.....Cylinder
3.....Common Exhaust 4.....Cylinder



Solenoid Models

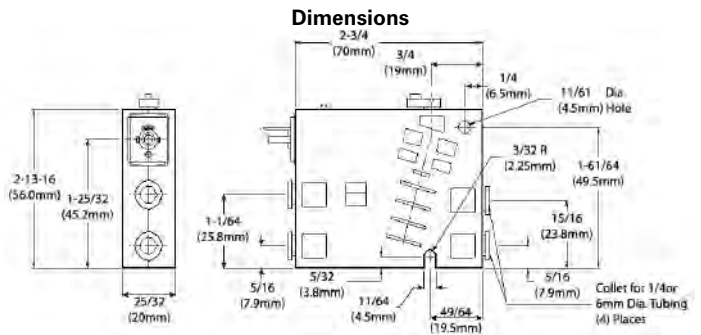

Function



Symbol



1.....Air Supply 2.....Cylinder
3.....Common Exhaust 4.....Cylinder

The Quick-Change Manifold

The Isonic® manifold system has been designed to virtually eliminate downtime. Connecting any valve to the manifold base is as easy as plugging in an electrical cord. With this patented "plug-in" design, replacing an individual valve on the manifold can be accomplished in a matter of seconds!

Isonic® Manifold Expands With Your Needs


Available in two, three or four station segments, the manifold's unique modular design creates a versatile, expandable control base. For manifolds larger than four stations, two or more segments can be easily combined to create any size manifold (multiple segments are assembled on DIN rail and secured with end stops). Manifold segments are easily isolated for applications with differential pressures.

Mounting Options

The Isonic® manifold can be either foot mounted or DIN rail mounted. 35mm DIN rail can be ordered from Mead.


Manifold Specifications

- Common Air Inlet Both ends: built in collets for 3/8" OD (or 10mm) tubing
- Foot Mounting 0.177 (4.5 mm) diameter
- DIN Rail Mounting Attaches to 35 mm DIN rail

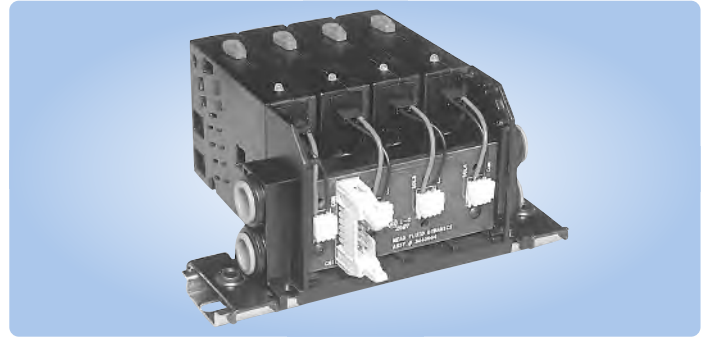


Simplify Wiring Tasks With Cable Connector

To further reduce set-up time and installation costs, the Isonic® manifold can be prewired to accept a single connection. With this option, a printed circuit board connects each of the manifold's valve stations. Simply plug in a standard flat-cable ribbon to the 10-pin connector for quick, clean wiring. A single connector can supply wiring for up to 8 valves. A second cable connector is necessary for manifolds of more than 8 valves.

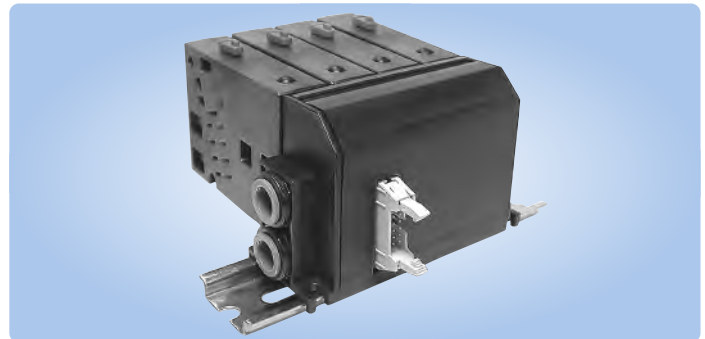

Pre-wired manifolds are supplied with a protective cover. The cover snaps easily into place to protect the wiring and circuit board. It is easily removed for servicing or replacing a valve.

V4 Manifold Dimensions

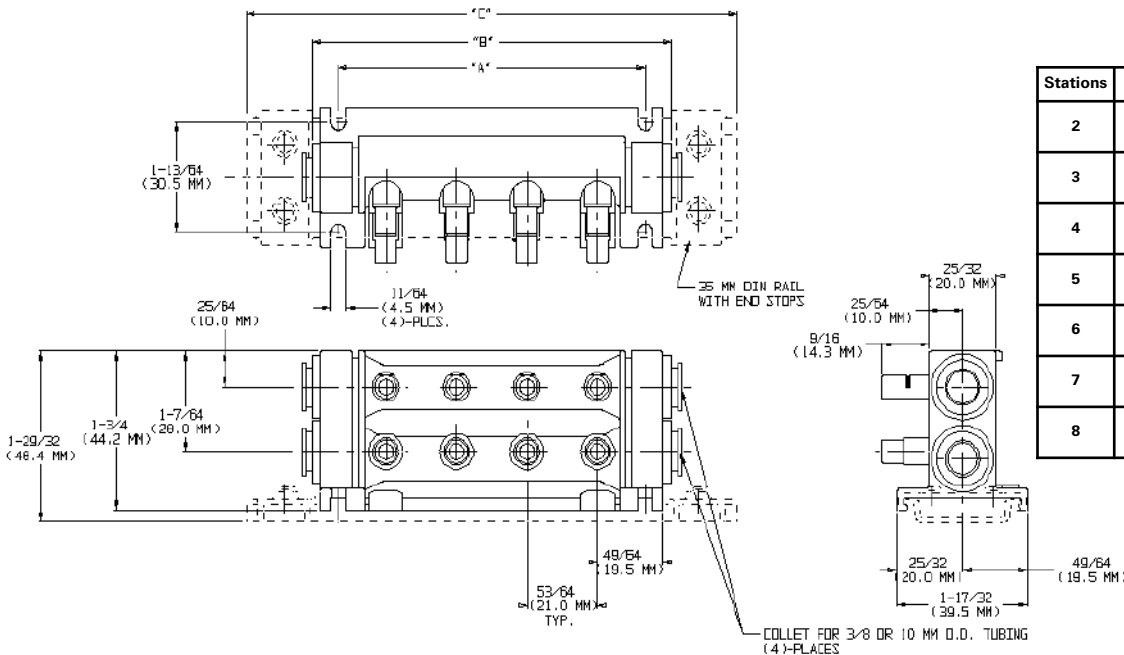

Stations	"A"	"B"	"C"
2	1-61/64 (49.5 mm)	2-35/64 (64.7 mm)	4-9/64 (105 mm)
3	2-25/32 (70.5 mm)	3-3/8 (85.6 mm)	4-15/16 (125 mm)
4	3-39/64 (91.5 mm)	4-13/64 (106.7 mm)	5-49/64 (146 mm)
5	5-9/64 (130.5 mm)	5-57/64 (145.6 mm)	7-19/64 (185 mm)
6	5-31/32 (151.5 mm)	6-9/16 (166.7 mm)	8-1/8 (206 mm)
7	6-51/64 (172.5 mm)	7-25/64 (187.7 mm)	8-61/64 (227 mm)
8	7-5/8 (193.5 mm)	8-7/32 (208.7 mm)	9-25/32 (248 mm)

How To Order

Valves:

V 4 A 0307 - A W 1 - ()****Product Category**

V = Valve

Family

4 = Isonic 4000 (4-way)

Collet Size

A = 1/4" O.D. Tube Collet

B = 6mm O.D. Tube Collet

Actuator Type

0507 = Single Air Pilot, Spring Return

0505 = Double Air Pilot

0307 = Single Solenoid, Spring Return

Options

V = Pilot Breather Vent Filter

LED

0 = (only available with connector Z)

1 = LED(not available with connector Z)

Connector

0 = None (pressure models)

W = Mini Quick Connect (w/board)

X = 8mm micro DIN Connector (w/board)

Y = Flying Lead (with board)

Z = Flying Lead (no board - DC only)

Solenoid Voltage

0 = None (pressure models)

A = 12 DC

B = 24 DC

D = 24 50/60 Hz AC

F = 110 / 120 50/60 Hz AC

Manifold:

M 4 A 03 - 2 Y**Product Category**

M = Manifold

Family

4 = ISONIC 4000 (4-way)

Collet Size

A = 3/8" O.D Tube Collets (Common Air Inlet)

B = 10mm O.D. Tube Collets (Common Air Inlet)

Number of Stations

02 = 2 Stations

03 = 3 Stations

04 = 4 Stations

N = N Stations

(modular segments are combined for manifolds over 4 stations)

Wiring Options

N = None

Y = Pre-wired 10-pin ribbon connector*
(wiring cover included)

C = Manifold with wiring cover

* Pre-wired manifolds not available with
DIN connector valves.**Manifold Assembly**

0 = Manifold Only

2 = Manifold Mounted on DIN rail
(required for 5 or more stations)

Accessories

Electrical Connectors

- 8mm Micro DIN Connector P1D1
- 8mm Pre-wired DIN Connector (includes 39" leads) . . P1D2
- Mini Quick-Connect (includes 18" leads) P1Q1

Mounting Brackets (For 4-Way Valves Only)

- Single Valve Mounting Bracket P4SM
- Single Valve DIN Rail Mount P4DM

Port Adapter (For 5/32" Ports)

- Converts Port to Barb for 1/4" OD Tube P1SA1
- Converts Port to Push-in Fitting (1/4" OD Tube) P1SA2

DIN Rail & Manifold End Stops

- 15mm DIN Rail (x = # of feet required) P1M1-x
- 35mm DIN Rail (x = # of feet required) P4M1-x
- 15mm Rail End Stop P1S1
- 35mm Rail End Stop P4S1

10-Pin Connector & Ribbon Cable (For Pre-Wired Manifolds)

- Connector w/ 1.0 meter leads P4RC10
- Connector w/ 1.5 meter leads P4RC15
- Connector w/ 3.0 meter leads P4RC30

Manifold Station Blocking Plugs & Port Plugs

- 5/32" (4mm) Station Plug (for empty manifold stations) . P1B1
- 1/4" Station Plug (for empty manifold stations) P4B1
- 6mm Station Plug (for empty manifold stations) P4B2
- 1/4" Port Plug P1P1
- 6mm Port Plug P1P2
- 3/8" Port Plug P4P1
- 10mm Port Plug P4P2

Miscellaneous Accessories

- Valve Locking Clip (locks 2 valves in place) P4LC-2
- (locks 3 valves in place) P4LC-3
- (locks 4 valves in place) P4LC-4
- Manifold Valve ID Strip (50 #s per strip) P4ID

Tube Collets (For Replacement Only)



- For 1/4" Port P4C1
- For 6mm Port P4C2
- For 3/8" Port P4CA
- For 10mm Port P4CB

Push-In Exhaust Mufflers


- For 1/4" Port MMP-250
- For 6mm Port MMP-006
- For 3/8" Port MMP-375
- For 10mm Port MMP-010

Wiring Connector Dimensions


Mini Quick-Connect - 24 AWG wires

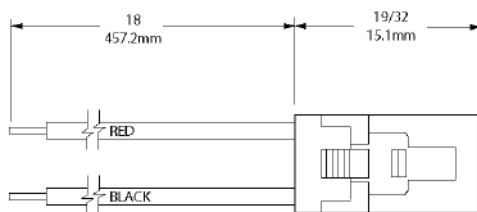

8mm DIN Connector



Mounting Bracket (P4DM)

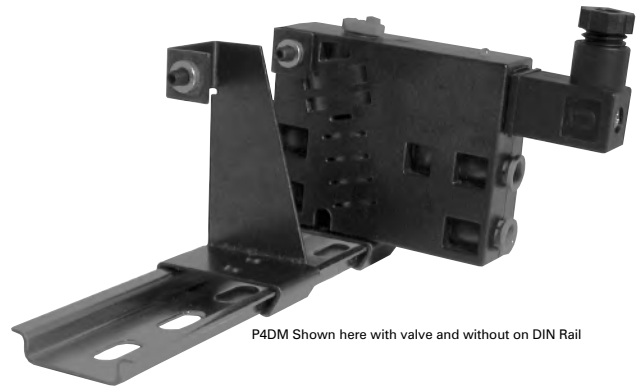

P4DM Shown here with valve and without on DIN Rail

Manifold Accessories



P4B1

Collets



P4C1 & P4CA



P4LC-4

Valve Identifiers (P4ID)

